


Technical Advice Document

Coil Ends

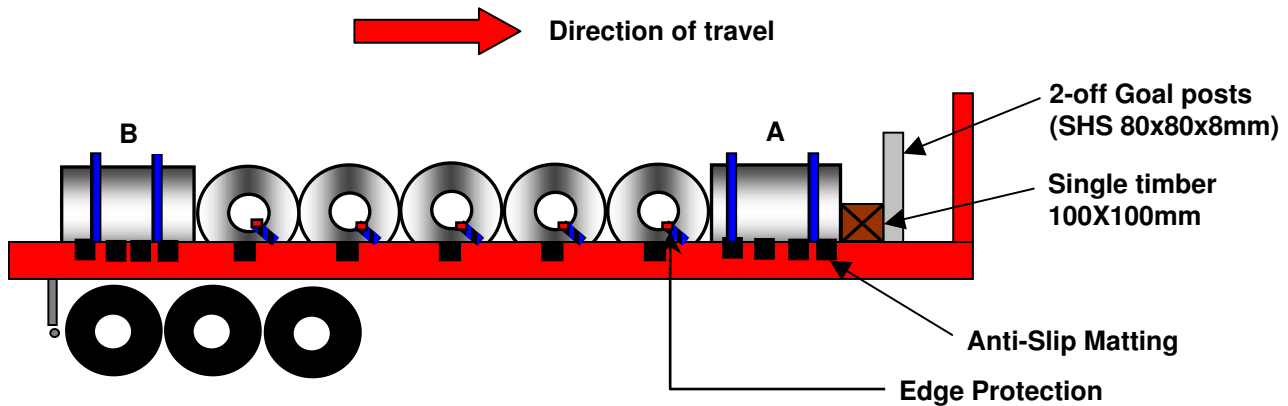

Essential Information

- Anti-slip matting to be placed between all coils and trailer deck.
- Goal posts and single timber as specified above.
- Coils A and B to be the heaviest coils in the load.
- Coils A and B to be restrained by two over-the-top webbing straps.
 - Positioned at least 350mm from the coil edge.
- Coils loaded across the trailer to be restrained with one 2000daN webbing strap for every 1.4 ton of coil.
- Webbing to be anchored at least 500mm in front of the centre of coil.
- Suitable edge protection **must** be used.

Note

The above restraint system is based on the assumptions stated in:
TAD-0005-CAL.doc

No tests have been conducted to confirm these assumptions