


Trisobuild™ 'U' Values
The depth below refers to both the minimum bracket & insulation height to achieve the stated 'U' value when using a LP1000 liner

- Depth 280 = 0.15 W/m²K. (assuming an enhanced spacer)
- Depth 240 = 0.18 W/m²K. (assuming an enhanced spacer)
- Depth 210 = 0.20 W/m²K.
- Depth 180 = 0.25 W/m²K.
- Depth 140 = 0.30 W/m²K.
- Depth 120 = 0.35 W/m²K.

NOTE: Fixing positions are indicative and rooflight to be installed as per manufacturers recommendations

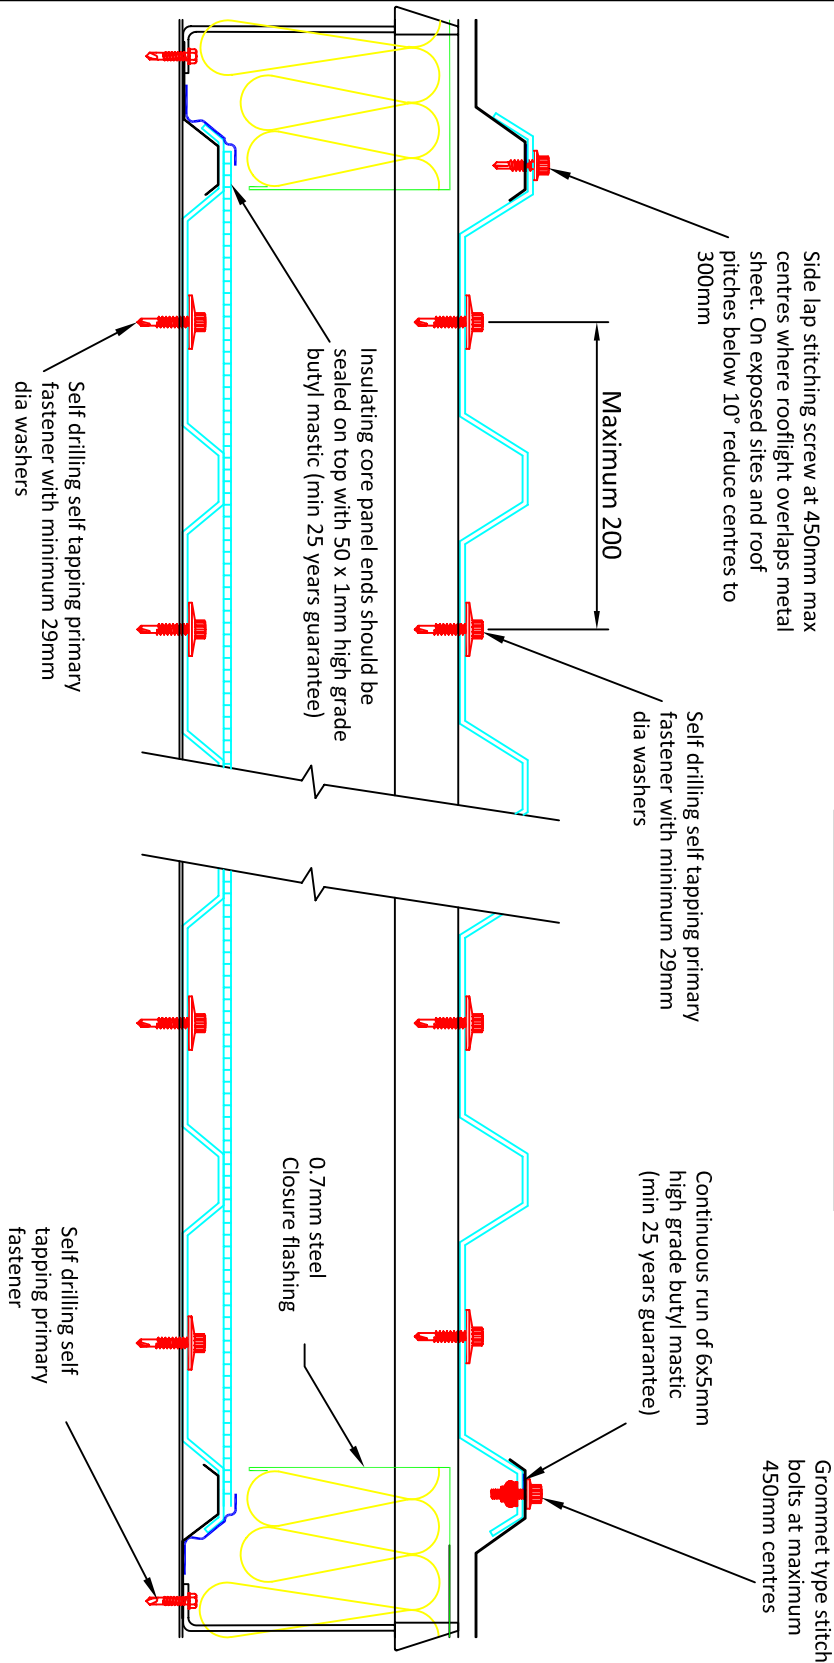

Tata Steel retain the right to amend the construction and technical specifications shown on this drawing without prior notice

TATA STEEL

SALES TEL: 01244 892199
TECHNICAL TEL: 01244 892133 / 34

www.tatasteelconstruction.com

PROJECT
**TYPICAL TRISOBUILD™
BUILT UP ROOF DETAIL**

TITLE
ROOFLIGHT SIDE LAP

DRAWN BY GMC	SCALE NTS
APPROVED BY DA	TOLERANCES
DATE 18/11/09	DRG. No. R1-017-01-C