



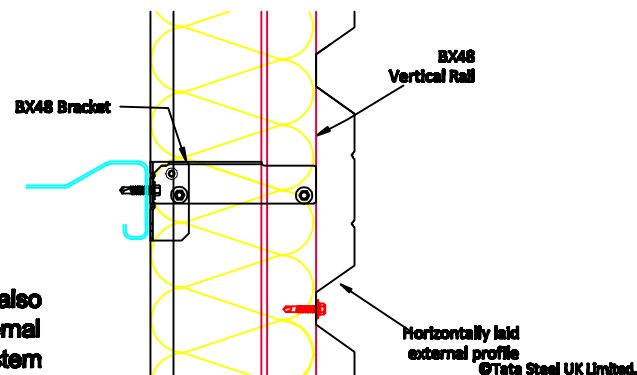

# Fire rating - 15mins insulation & 240 mins integrity

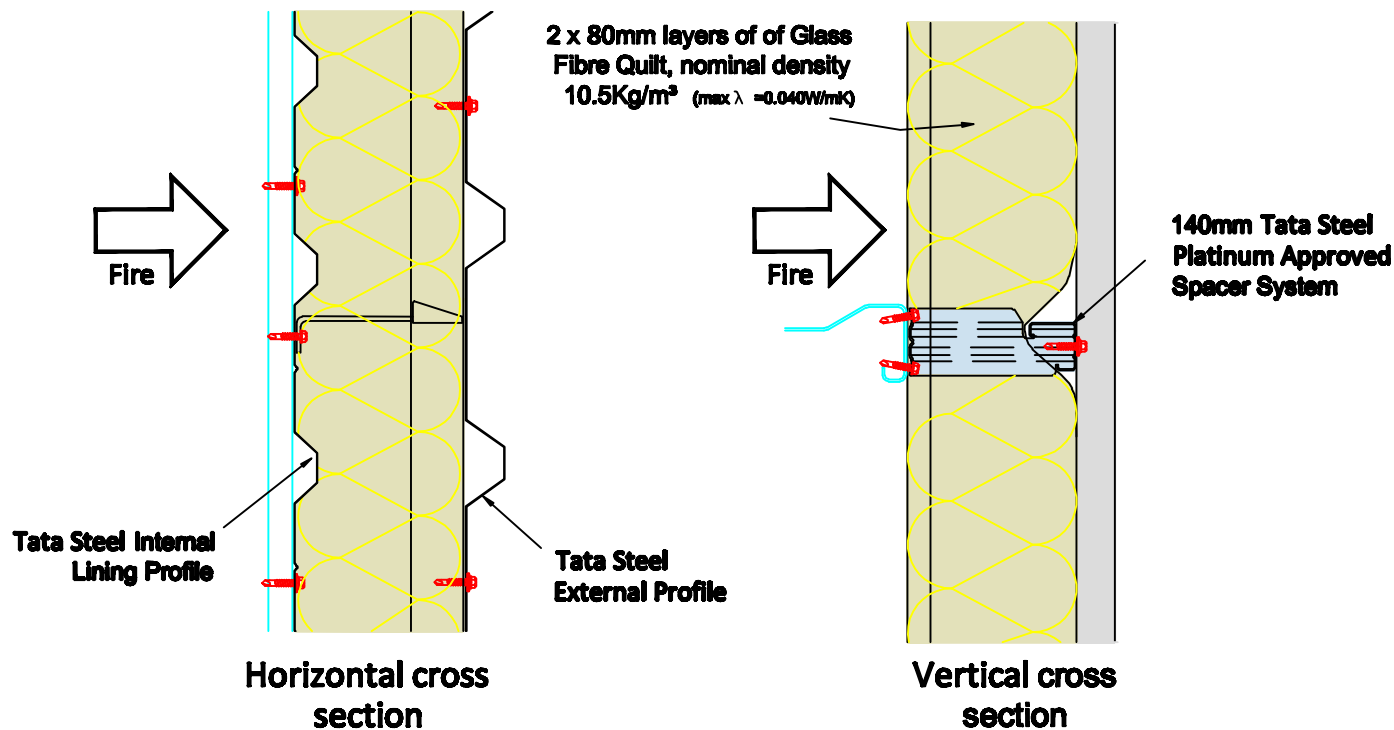

All support steelwork by others

The fire rating for this system is also applicable when using a horizontal external profile with the BX48 spacer system

## Trisobuild™ 'U' Values

System as shown = 0.35 W/m<sup>2</sup>K

Fire performance ratings will be unaffected if deeper insulation and spacer brackets are used for lower U-value requirements



LPS1183:1 Approved  
4000/74, 15, 16 & 22

Tata Steel retains the right to amend the construction and technical specifications shown on this drawing without prior notice

**TATA STEEL**

SALES TEL: 01244 892199  
TECHNICAL TEL: 01244 892133 / 34

[www.tatasteelconstruction.com](http://www.tatasteelconstruction.com)

PROJECT **TYPICAL TRISOBUILD™ VERTICAL WALL DETAILS**

TITLE **Fire Wall - 15 mins insulation / 240 mins integrity**

DRAWN BY **GMc**

SCALE **NTS**

APPROVED BY **DA**

TOLERANCES

DATE **05/07/10**

DRG. No. **W1-029A-02-B**