

TRISOMET® U-VALUES

135mm Core = 0.15 W/m<sup>2</sup> K.  
 120mm Core = 0.16 W/m<sup>2</sup> K.  
 100mm Core = 0.20 W/m<sup>2</sup> K.  
 80mm Core = 0.25 W/m<sup>2</sup> K.  
 60mm Core = 0.33 W/m<sup>2</sup> K.  
 40mm Core = 0.46 W/m<sup>2</sup> K.



*Tata Steel retain the right to ammend the construction and technical specifications shown on this drawing without prior notice.*

**TATA STEEL**

OFFICE TEL: 01244 892199  
 TECHNICAL TEL: 01244 892133 / 34

www.tatasteelconstruction.com


PROJECT  
**TRISOMET® HORIZONTAL WALL DETAILS**

TITLE  
**HORIZONTALLY LAID END LAP**


DRAWN BY GMc	SCALE NTS
-----------------	--------------

APPROVED BY JCA	TOLERANCES
--------------------	------------

DATE 13/01/09	DRG. No. E5-003-03-C
------------------	-------------------------

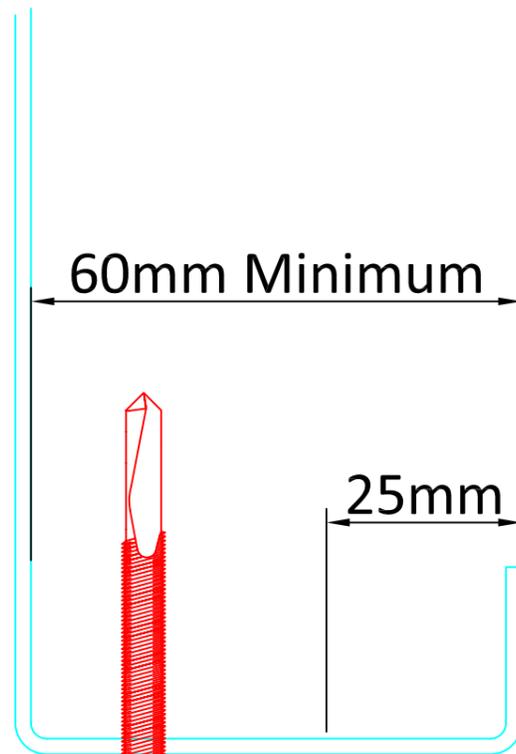

Self drilling self tapping primary fastener with minimum 15mm diameter washers

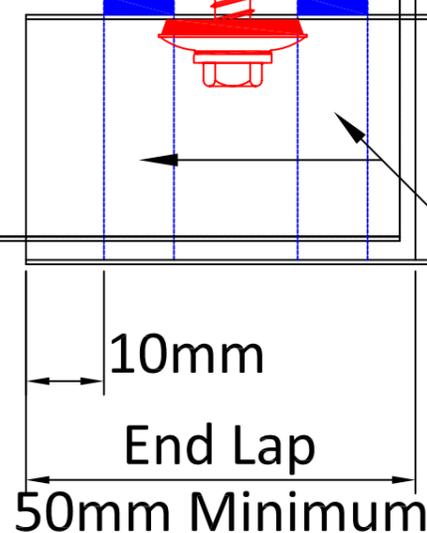

Two continuous runs of gun grade mastic